

## HI ENERGY

# HC 25

120 watt







speaker

### Technical Specifications

Component	Tweeter	
Size	mm	25 (1")
Power Handling (Watt)	peak continuous program	120 120W@2,5kHz 12dB Oct.
Impedance	Ohm	4
Frequency response	Hz	1,6k-22k
Sensitivity	dB/SPL	92
Outer diameter	mm	44
Mounting hole diameter	mm	41
Magnet size	mm	41
Total depth	mm	27
Mounting depth	mm	17
Weight of one component	kg	0,060
Voice coil diameter	mm	25



1. Cotton soft dome tweeter.
2. 25mm  $\phi$ , ferrofluid-cooled mobile voice coil.
3. High energy neodymium magnet.
4. Rear acoustic chamber.
5. Revolving support and accessories for factory location and flush mounting.

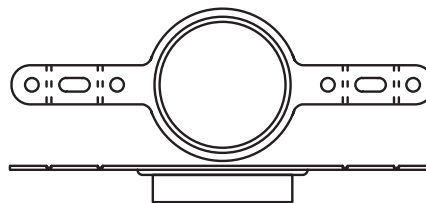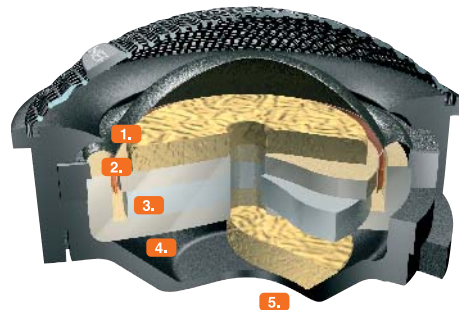

### Electro-Acoustic Parameters

D	mm	25
Xmax	mm	-
Re	ohm	3,2
Fs	Hz	1200
Le	mH@1kHz	0,60
Le	mH@10kHz	0,04
Vas	lit	-
Mms	gr	-
Cms	mm/N	-
BL	T-m	-
Qts		0,75
Qes		1,70
Qms		1,40
Spl (1m/2,83V)	dB	92

