


ML 500R Mille

180 watt

Technical Specifications

Component	Midrange	
Size	mm	17x15
Power Handling (Watt)	peak	180
	continuous program	180@900Hz 12dB Oct.
Impedance	Ohm	8
Frequency response	Hz	700-35k
Sensitivity	dB/SPL	93
Outer diameter	mm	168x88
Mounting hole diameter	mm	156x65
Mounting depth	mm	10
Total depth	mm	19
Weight of one component	kg	0,640

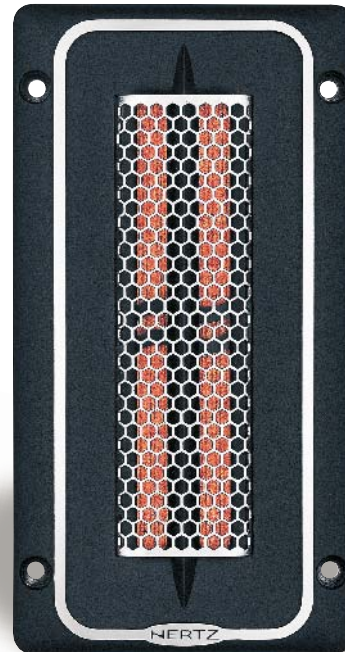

MILLE

Electro-Acoustic Parameters

D	mm	-
Xmax	mm	-
Re	ohm	7,5
Fs	Hz	370
Le	mH@1kHz	-
Le	mH@10kHz	-
Vas	lit	-
Mms	gr	-
Cms	mm/N	-
BL	T-m	-
Qts	-	-
Qes	-	-
Qms	-	-
Spl (1m/2,83V)	dB	93

- Acoustically transparent aluminium grille.
- Die-cast aluminium face plate designed for the best off-axis response.
- Ultra-light Mylar layer with silver deposit, for extraordinary flat response at ultrasonic frequencies.
- Push-pull REN® magnet with 12 Neodymium bars for natural, thrilling performance.
- Rubber sealing gaskets for vibrations rejection.
- Dipolar emission for ideal damping.

